

Mk 5 Universal Pump

Bilge And Waste Water Transfer Pump

- Three different mounting orientations in one pump (deck, bulkhead and thru deck)
- Tough, proven, reliable design
- Inspection port allows for easy maintenance (no tools required)
- Fully protected diaphragm
- Odour-proof seals
- Non-choke valves
- High flow rate of 66 ltrs (17.5 US gals) per minute
- Approved by Lloyds (MSA) and U.S. Coast Guard as a lifeboat pump
- Suitable for pumping saltwater and diesel

Typical Uses


- Holding tank pump out
- Toilet flush
- Emergency bilge pump out
- Water ballast pump

Model Specifications

Model	Mk5 Universal Pump (Multiple Mounting Options)
Product Code	BP0510
Weight	1.36 kg (3.0 lbs)
Hose Connections	38 mm (1½") Hose Connections
Materials	Pump Body: Glass-filled Polypropylene, Diaphragm Valves and Seals: Nitrile, Operating Lever: Acetal, Glass-filled Nylon Spring and Fasteners: Stainless Steel
Materials In Contact With Fluid	Glass-filled Polypropylene, Acetal, Nitrile, Stainless Steel
Service Kit	AK8050 - Service Kit for Mk5 Contains: Diaphragms, Valves and Circlips
Accessories	DP9906 - Deck Plate Kit (includes cover) AS0511 - Spare Handle
Maximum Suction Lift	4.5 m (15 ft)
Maximum Discharge Head	4.5 m (15 ft)

Performance Data

Suction Lift	1 m (3 ft)
Discharge Head	0.5 m (1.5 ft)
45 Strokes per Minute	42 ltrs (11 US gals)
70 Strokes per Minute	66 ltrs (17.5 US gals)

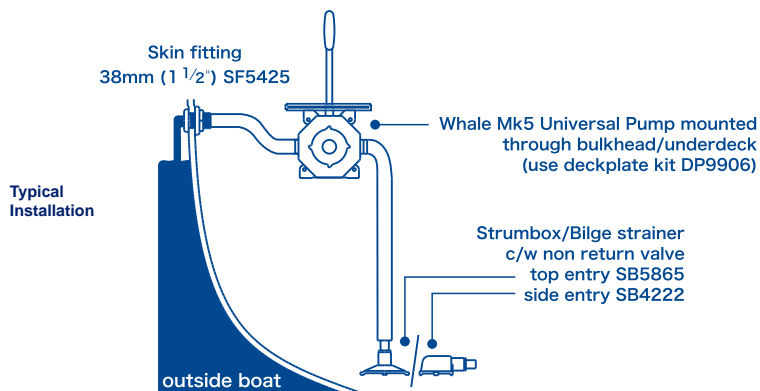

Mk 5 Universal Pump
5 Year Warranty

